


TECHNICAL FEATURES and FUNCTIONS

1. DIMENSIONS

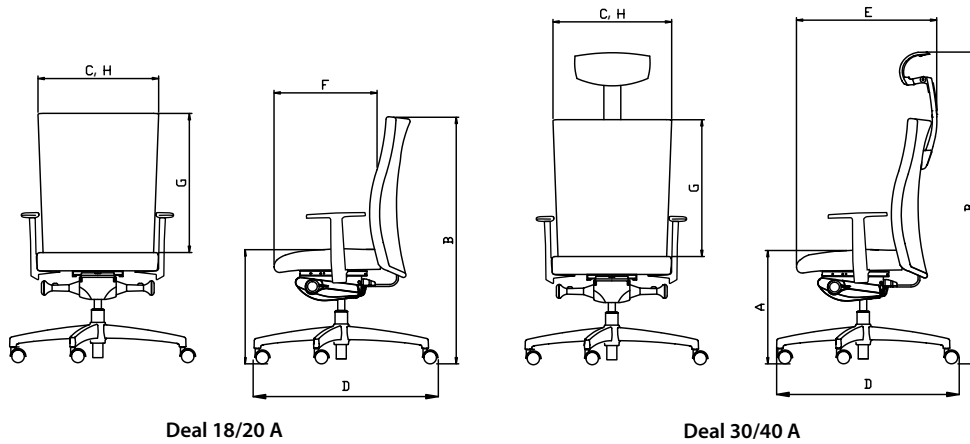

Dimensions (cm)	Overall width D	Total depth E	Total height B^	Seat height A*	Seat width C	Seat depth F#	Backrest height G	Backrest width H	Weight (kg)
Deal 18/20	64	50	98-109	45-56	49	45	63	58	14,8
Deal 30/40	64	50	116-127	45-56	49	45	63	58	14,9
Deal 10 A	64	52	92	45	49	45	53	58	11,0

^ In the lowest position, in the highest position, * According to DIN norms with load and without upholstery, # According to DIN norms, up to the lumbar support

2. MATERIALS AND OPTIONS

2.1. Mechanism

Deal 18/30: Permanent Contact mechanism with aluminum body in black (RAL 9005). Free-swinging backrest, possibility to lock the mechanism in 4 positions, anti-shock feature that prevents the backrest from hitting the user's back when the lock is opened, infinitely adjustable seat height.

Deal 20/40: Black (RAL 9005) synchronous mechanism with aluminum body. 2:1 synchronized oscillation movement on the backrest and seat, the possibility of locking the mechanism in 5 positions, the anti-shock feature that prevents the backrest from hitting the user's back when the lock is unlocked, the infinitely adjustable seat height.

2.2. Bases

- Black colored (five) star base made of reinforced polyamide.

- Polished, aluminum injection molded (five) star base.

2.3. Castors

Weight sensitive brake system with double connection, options for hard or soft floor, in accordance with DIN EN 12529 norm.

- For hard floor: TPU (thermoplastic polyurethane) coated polypropylene Ø65 mm castor

- For soft floor: Polypropylene Ø65 mm castor.

2.4. Waiting Chairs Frame

Foot with surface electrostatic powder paint or chrome plated (Ø25 x 2 mm). Pipe made of high-strength sheet metal and metal frame with lugs are reinforced with reinforcement pipes.

2.5. Foaming Parts

- It is injection polyurethane and does not contain CFC (chlorofluorocarbon).

Density: 58 kg/m3 +/- 3
Seat foam thickness: 50 mm

2.7. Headrest

Standard on Deal 30/40 models.
- Headrest is made of polypropylene plastic skeleton.
- 80 mm in the headrest. height adjustment and tilt adjustment can be made at 4 different angles.

2.8. Individual Weight Adjustment

Deal 18, 20, 30, 40: It is adjusted with the cylindrical regulator located in the lower middle part of the seat. Backrest swing stiffness can be adjusted according to the weight of the user. When you turn the regulator clockwise a few turns, the backrest oscillation gets harder, when you turn it counterclockwise, it softens.

2.9. Embroidery (Optional)

Maximum dimensions for the logo can be made at 7 cm width, and the width-length is measured in direct proportion. 100% polyester thread is used for embroidery. It can be applied to the desired area on the front or back, depending on the backrest model. The minimum order quantity for logo applications is 50 pieces. A separate embroidery work is done for each logo. The yarn color closest to the logo color is selected. There is no restriction on the number of colors.

3. ARMRESTS

A Armrest: It is black polypropylene. It can be installed later by a technical personnel.

MFA Armrest: Multifunctional chrome plated metal armrest. Armrest pads are black polyurethane. It can be rotated in 7.5 cm. height adjustment range and in 3 positions (+35° / -35°). It can be installed later by a technical personnel.

4. TECHNICAL RULES, TESTS AND QUALITY APPROVALS

- Working chairs comply with TS EN 16139:2013.

- Waiting chairs comply with TS EN 1335-1 and TS EN 1335-2 suitable.