


TECHNICAL FEATURES and FUNCTIONS

1. DIMENSIONS

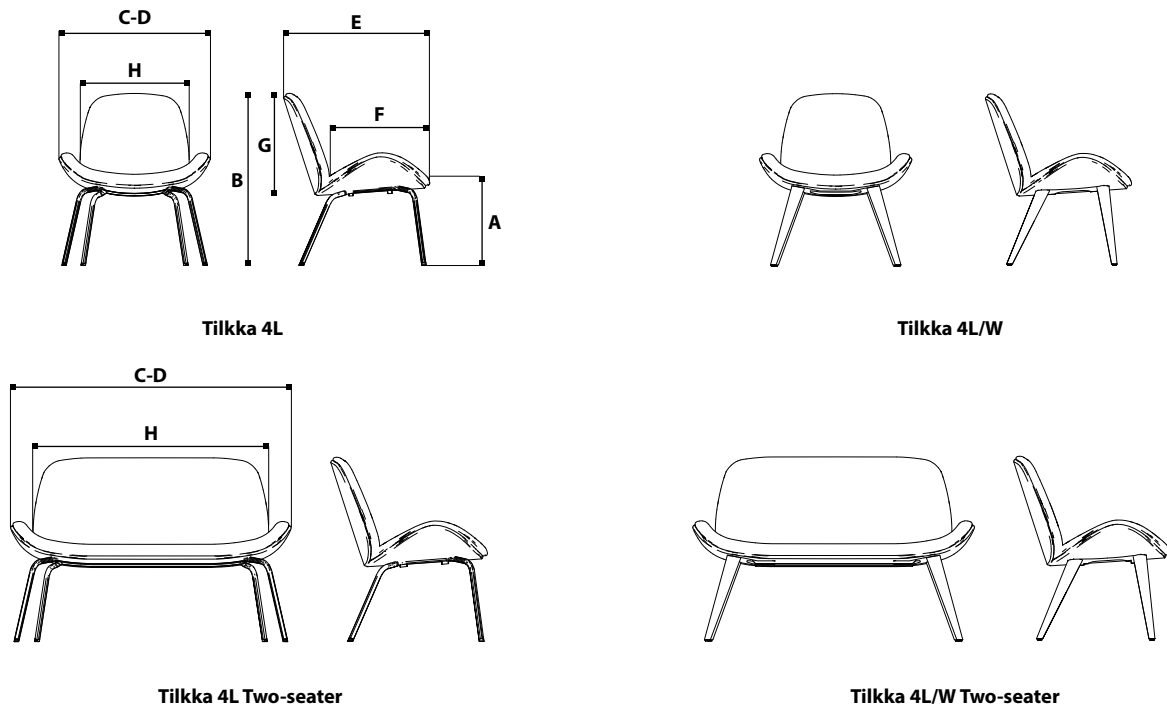

Dimensions (cm)	Overall width D	Total depth E	Total height B	Seat height A	Seat width C	Seat depth F	Backrest height G	Backrest width H	Weight (kg)
Tilkka 4L	66	57	76	42	66	48	38	49	11,2
Tilkka 4L/W	66	57	76	42	66	48	38	49	14,1
Tilkka 4L Two-seater	116	57	76	42	116	48	38	99	23,6
Tilkka 4L/W Two-seater	116	57	76	42	116	48	38	99	26,2

2. MATERIALS AND OPTIONS

2.1 Base and Frame

Metal base: It is produced as a 4-leg model from ø20x2 mm steel pipe with electrostatic powder painted or chrome plated.

Wooden base: It is produced as 4 legs of solid beech wood mounted on a frame from ST37 sheet material.

2.2 Seat and Backrest

The seat and backrest, ergonomically shaped from 8-ply 12 mm-thick beech plywood material, are made of 7 ply and 10.5 mm thick backrest produced by pressing in the mold, and a complete fabric is furnished by combining them with sponge. Again, it is furnished with 3 ply 4.5 mm beech plywood seat and backrest outer woods, 10 mm thick sponge and fabric.

2.3 Foaming Parts

Intensity :  
Seat 50 kg/m<sup>3</sup> +/- 3  
Backrest 35 kg/m<sup>3</sup> +/- 3

Seat foam thickness: 20-30 mm  
Backrest foam thickness: 30-45 mm

2.4 Embroidery (Optional)

The maximum dimensions for the logo can be made at 7 cm width, and the width-length is measured in direct proportion. 100% polyester thread is used for embroidery. It can be applied to the desired area on the front or back, depending on the backrest model. The minimum order quantity for logo applications is 50 pieces. A separate embroidery work is done for each logo. The yarn color closest to the logo color is selected. There is no restriction on the number of colors.

3. TECHNICAL RULES, TESTS AND QUALITY APPROVALS

- TS EN 16139:2013

- TS EN 12520

- ISO 9001