


TECHNICAL FEATURES and FUNCTIONS

1. DIMENSIONS

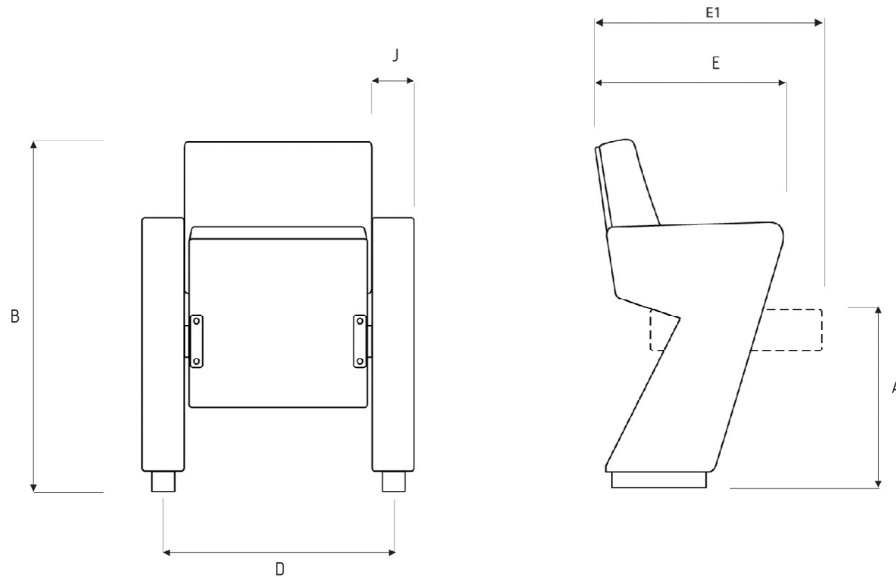

Event

Dimensions (cm)	Axis width D	Total depth E / E1	Total height B	Seat height A	Armrest width J	Weight (kg)
Event	60	47 - 60	90	46	8	36

2. MATERIALS

2.1. Seat and Backrest

It is produced from injection polyurethane foam in a form suitable for ergonomics. The seat and backrest boards are made of beech plywood, combined with a cold foam, and a complete fabric is laid.

2.2. Metal Parts

Powder coated black (RAL 9005).

2.3. Foaming Parts

It is injection polyurethane and does not contain CFCs (chlorofluorocarbons).

Density: 57 kg/m³ +/- 3
Seat foam thickness: 52 mm
Backrest foam thickness: 47 mm

3. OPTIONS

3.1. Armrest Types

Standard Armrest: Metal profile carcass is covered with MDF and covered with fabric.

3.2. Fabric

In addition to the existing fabric options, non-flammable fabric types are available for safety.

3.3. Embroidery (Optional)

The maximum dimensions for the logo can be made at 7 cm width, and the width-length is measured in direct proportion. 100% polyester thread is used for embroidery. It can be applied to the desired area on the front or back, depending on the backrest model. A separate embroidery work is done for each logo. The yarn color closest to the logo color is selected. There is no restriction on the number of colors.

4. TECHNICAL RULES, TESTS AND QUALITY APPROVALS

- ISO 9001 certified.

- It is TS EN 12727 certified.