


## TECHNICAL FEATURES and FUNCTIONS

### 1. DIMENSIONS

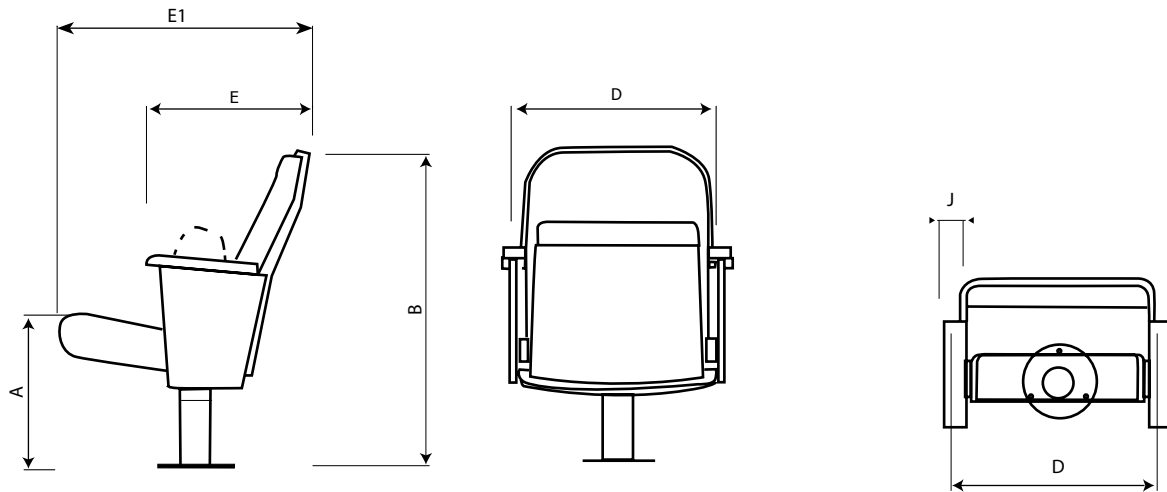

Liza

Dimensions (cm)	Axis width D	Total depth E / E1	Total height B	Seat height A	Armrest width J	Weight (kg)
Liza	53	44 / 60	92	48	5.5	26



## 2. MATERIALS

### 2.1. Backrest

It is produced from injection polyurethane in a form suitable for back ergonomics. The back board made of beech wood is combined with cold foam and completely fabric is laid. A radius can be given to the upper part of the backrest upon request. A wooden cover can be applied to the back.

### 2.2. Seat

It is produced from injection polyurethane in a form suitable for ergonomics. The seat board made of beech wood is combined with cold foam and completely fabric is upholstered. Wooden cover can be applied under the seat.

### 2.3. Metal Parts

Powder coated black (RAL 9005). Other colors in the RAL catalog can be applied upon request.

### 2.4. Wooden Parts

There are 5 color options available as wenge, mahogany, walnut, cherry and natural. If desired, different colors can be applied optionally.

### 2.5. Armrests

The armrests can be wooden or upholstered on the armrests.

### 2.6. Base

Diffuser base, diffuser (perforated) pipe feet used for ventilation and sound acoustics are available. It can be Ø95-150 mm or Ø80-95 mm.

### 2.7. Foaming Parts

It is injection polyurethane and does not contain CFC (chlorofluorocarbons).

Density: 59 kg/m<sup>3</sup> +/- 3  
Seat foam thickness: 52 mm  
Backrest foam thickness : 48 mm

## 3. OPTIONS

### 3.1. Fabric

Non-flammable fabric types for safety available.

### 3.2. Embroidery (Optional)

The maximum dimensions for the logo can be made at 7 cm width, and the width-length is measured in direct proportion. 100% polyester thread is used for embroidery. It can be applied to the desired area on the front or back, depending on the backrest model. A separate embroidery work is done for each logo. The yarn color closest to the logo color is selected. There is no restriction on the number of colors.

## 4. TECHNICAL RULES, TESTS AND QUALITY APPROVALS

- DIN EN ISO 9001 certified.

- It is TS EN 12727 certified.