


TECHNICAL FEATURES and FUNCTIONS

1. DIMENSIONS

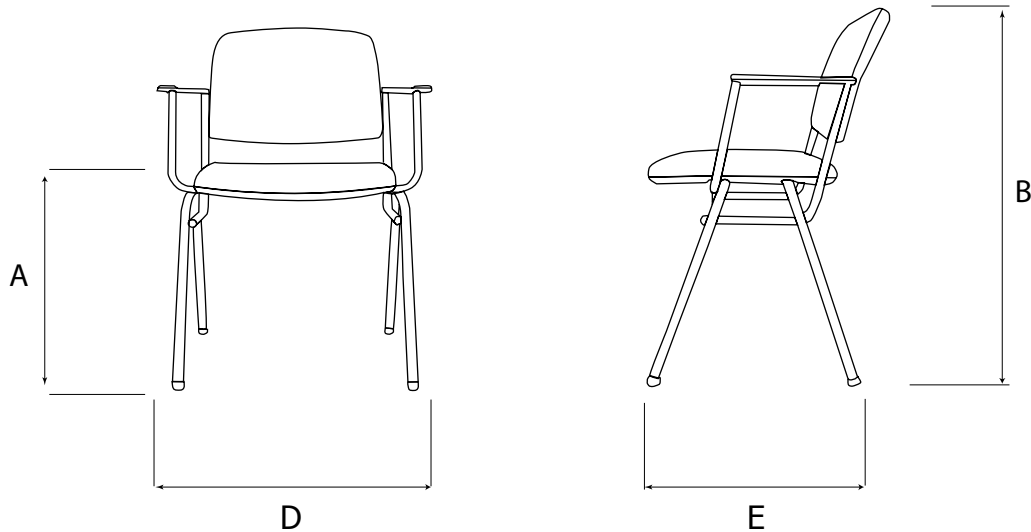

Reto A

| Dimensions (cm) | Overall width D | Total depth E | Total height B | Seat height A | Weight (kg) |
|-----------------|--------------------|------------------|-------------------|------------------|-------------|
| Reto A | 54 | 46 | 82 | 46,5 | 5,7 |

2. MATERIALS

2.1. Construction

The 4-leg frame is made of ø19 mm metal pipe and chrome plated.

Beech plywood backrest and seat woods are upholstered with foam and fabric. The seat and back are closed with black PP covers. The foot frame is mounted to the body from 4 points, there are PP glides on the foot base.

2.2. Stacking

Reto model max. Up to 8 can be stacked.

2.3. Foaming Parts

The seat, armrest and backrest foam made of high-density, non-deformable cutting foam does not contain CFC (chlorofluorocarbon).

Density: 22 kg/m³ +/- 3
Backrest Foam Thickness: 20 mm.
Seat Foam Thickness: 20 mm.

2.4. Armrests

There are armrest pads made of PP material on ø16 mm metal armrest pipes.

3. TECHNICAL RULES, TESTS AND QUALITY APPROVALS

- Conforms to TS EN 1335-1 and TS EN 1335-2.
- ISO 9001 certified.