


TECHNICAL FEATURES and FUNCTIONS

1. DIMENSIONS

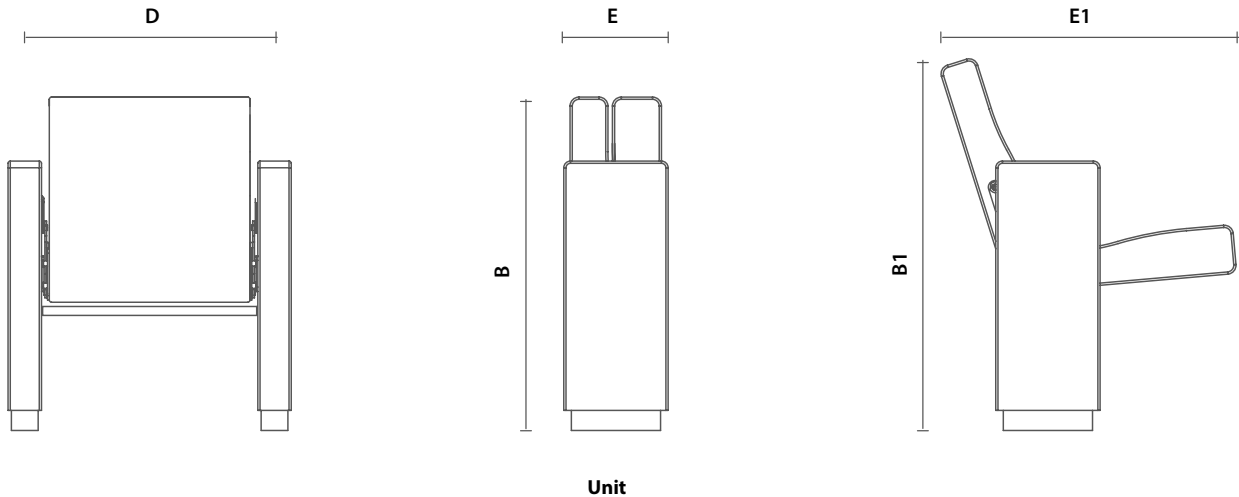

Dimensions (cm)	Axis width D	Total depth E-E1	Total height B-B1	Weight (kg)
Unit	50 - 56	23 - 64	75 - 88	24

2. MATERIALS

2.1. Construction

The seat and backrest carrier metals are bolted together on the two legs, integrated into each other.

2.2. Backrest

It is produced from injection polyurethane in a form suitable for back ergonomics. The back board made of beech wood is combined with cold sponge and completely fabric is laid. Thanks to its zippered fabric upholstery feature, it provides a quick change opportunity.

2.3. Seat

It is produced from injection polyurethane in a form suitable for ergonomics. The seat board made of beech wood is combined with cold sponge and completely fabric is upholstered. The seat can be folded. Thanks to its zippered fabric upholstery feature, it provides a quick change opportunity.

2.4. Metal Parts

Metal parts are electrostatic powder paint black (RAL 9005).

2.5. Foaming Parts

It is injection polyurethane and does not contain CFCs (chlorofluorocarbons).

Density: 57 kg/m³ +/- 3
Seat foam thickness: 60 mm
Backrest foam thickness: 47 mm

3. OPTIONS

3.1. Armrest Types

Standard Armrest: The wooden armrest is upholstered in fabric.

3.2. Fabric

In addition to the available fabric options, there are non-flammable fabric types for safety.

3.3. Other Options

- Different armrest options for optional different axis distances
- Optional wood veneer on armrest
- Optional full beech plywood armrest.
- There are 5 color options available as wenge, mahogany, walnut, cherry and natural. If desired, different colors can be applied optionally.
- Seat row numbers and corridor lighting fixture
- Different axis distances applicable according to the projects

3.4. Embroidery (Optional)

The maximum dimensions for the logo can be made at 7 cm width, and the width-length is measured in direct proportion. 100% polyester thread is used for embroidery. It can be applied to the desired area on the front or back, depending on the backrest model. A separate embroidery work is done for each logo. The yarn color closest to the logo color is selected. There is no restriction on the number of colors.

4. TECHNICAL RULES, TESTS AND QUALITY APPROVALS

- ISO 9001 certified.
- It is TS EN 12727 certified.